



global solutions :
local support™

Vertically Polarized Omni Antennas 5470 to 5850 MHz Operation

The 5GHz omni-directional antenna systems offered by Laird Technologies are constructed of UV-stable fiberglass with all stainless steel brackets standard. They have type N female bulkhead connectors. N male connectors also available for mounting directly to equipment. The horizontal pattern is a full 360 degrees with gain flatness better than 2dB. The antennas are vented at the base to prevent any moisture build-up inside. Antennas are DC grounded for lightning protection.

Features and Benefits:

- 12 dBi antenna gain
- Type N female integrated bulkhead connector
- Rugged, lightweight and waterproof
- Also available with N male connector

Applications

- 5.4 to 5.8 GHz ISM band applications
- Base station antennas
- 802.11a wireless systems
- Point to multi-point systems
- Wireless broadband systems
- WiFi access points
- Mesh networks

For sales information:

Telephone 800-323-3757


E-Mail sales@pacwireless.com

or visit: www.pacwireless.com

Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	5470		5850	MHz
VSWR		1.5:1		
Impedance		50		OHM
Input Power			100	W
Pole Diameter (OD)	1 25		2 50	mm inch
Operating Temperature	-40		+70	Deg C
Gain	12dBi			
Vertical Beam Width	7 deg			
Rated Wind Velocity	125mph (56 M/sec)			
Weight	1.1 Lbs (0.5Kg)			
Dimension (L +/-1.0") Diameter Approx. 0.8" (20mm)	27.5" (700mm)			

Antenna Patterns at 5GHz

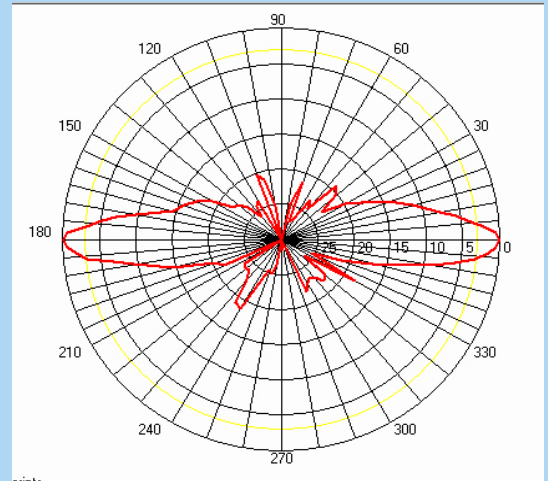

12dBi Antenna Pattern

--- E Plane
--- H Plane



Special Features

- All stainless steel bracket for better corrosion protection
- Extra wide strap and larger diameter base for better stability
- Extended connector shroud for better weatherproofing
- Extended length N connector for easier/more reliable weatherproofing

Wind Loading (Lbs.)

Model	100MPH	125MPH
OD58-12	8.75	13.7

System Ordering:

- OD58-12 12dBi 5470-5850Mhz wideband omni-directional antenna
 OD58M-12 12dBi 5470-5850Mhz wideband omni-directional antenna with N male connector

Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty



Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

Specifications subject to change without notice.